

SMART_{LINE}

EN



PRATIKA 55 smart


minipack-torre

A 180° REVOLUTION




PRATIKA 55 SMART

BUILT-IN TUNNEL

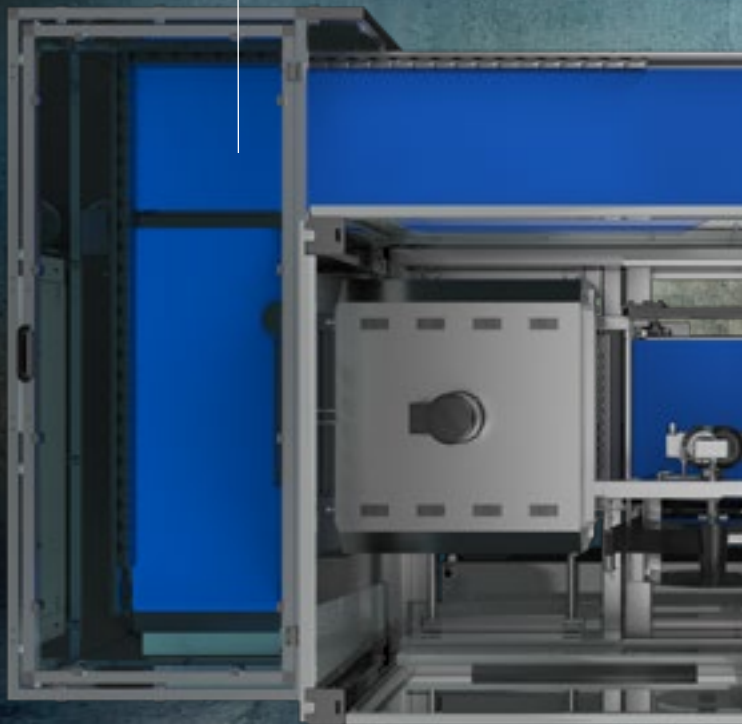

ECONOMIC


"COME BACK" OPTION FOR A SINGLE OPERATOR

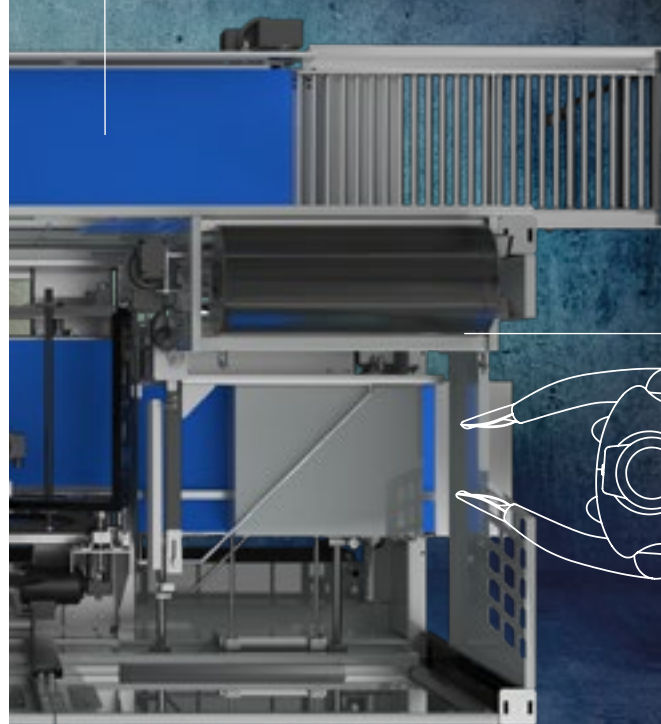


FULL ELECTRIC

EXTREMELY COMPACT

BEFORE CONFIGURATION WITH WRAPPING MACHINE + STANDARD SHRINK TUNNEL
SURFACE AREA = 20,8M² • OPERATOR USED = 2

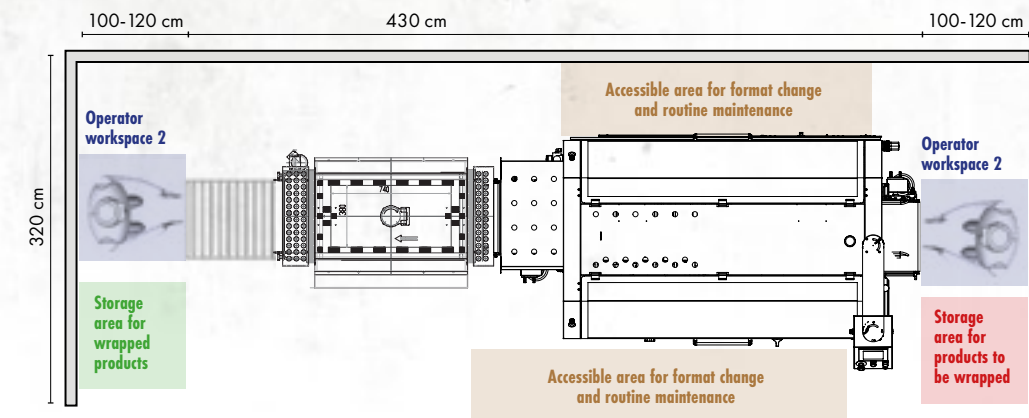

NOW CONFIGURATION WITH PRATIKA 55 SMART + PERIMETER BELTS
SURFACE AREA = 13,6M² • OPERATOR USED = 1

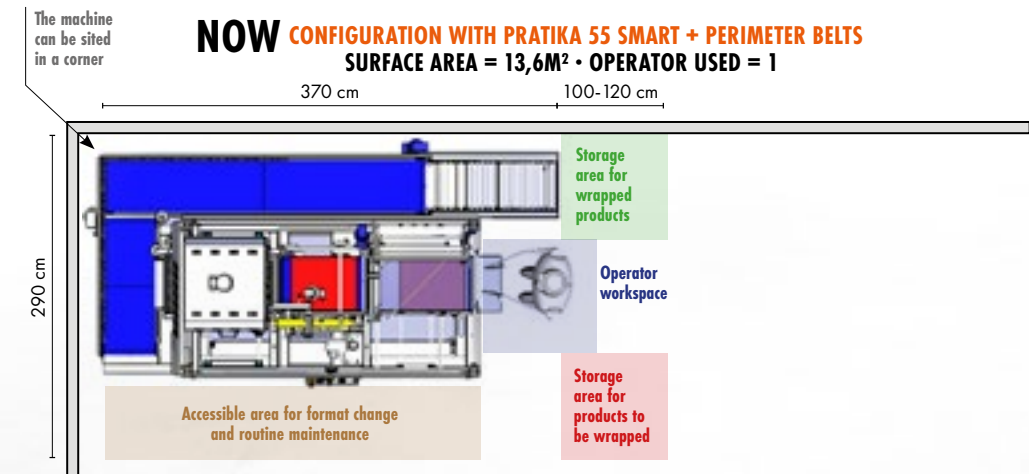

PRATIKA 55 SMART

THE AUTOMATIC COMPACT SHRINK WRAPPING MACHINE WITH BUILT-IN TUNNEL



PLUS

- Schneider Electric Brushless Servo Motor
- Schneider Electric PLC-managed control logic
- Electric power supply, not pneumatic
- Colour touchscreen control panel
- Compact (2.2 m²)
- Economic

TECHNICAL FEATURES

- L-seal system
- Schneider Electric M221 PLC with 128 customisable and nameable programs
- 4.3-inch colour touchscreen console
- USB and SD interface
- Schneider Electric Brushless Drive motor
- Micro-hole-punch device with film tension control based on the height of the product
- Height-adjustable triangle and sealing bar
- Sealing bar aperture can be set via the touchscreen control panel
- Belt speed (entry/exit) regulated by Schneider Electric's "Altivar" programmable inverter (optional)

- Interface connectors with additional loading and unloading belts
- Fully antistatic standard belts that comply with the tightest regulations in the food industry (inc. FDA)
- Motorised winder
- Built-in tunnel with low energy consumption

TECHNICAL DATA

- Electrical power supply V 400 3Ph + N
- Maximum power (tunnel included) kW 7.5
- Hourly production 0-1200 pz/h (based on the film used and product size)
- Maximum product dimensions mm 400 x 420 x h.120 (Maximum dimensions cannot be used simultaneously)
- Maximum roll dimensions (diameter) mm 300
- Maximum reel strip dimensions (width) mm 600
- Working plate height (infeed belt h.) mm 870
- Machine dimensions mm 2390 x 1190 x h.1680
- Usable polyolefin film thickness of 9-38 microns
- Machine weight (net/gross) kg 677/813

SMART FILM

THE ONLY FILM THAT HELPS THE OPERATOR

The controlled lubricity and the seal's good heat-resistance makes Smart film easy-to-use, both in manual and automatic wrapping machines.



POLYOLEFIN SHRINK WRAP FILM WITH UNIQUE FEATURES

- Excellent optical properties
- High mechanical resistance
- Even at low temperatures
- Suitable for contact with food
- High tensile strength
- Excellent seal-ability

SMART OPEN

OPENING THE FILM HAS NEVER BEEN SO EASY



A revolutionary technology in its simplicity, to facilitate the opening of the shrink wrap film.



minipack® - torre
The Original Pioneers

Idépack Verpakkingsmachines B.V.

Zeilmaker 8

3861 SM NIJKERK

T. +31(0)33-299 00 08

info@idepack.com

www.idepack.com



Minipack®-Torre shall not be held liable for typos or printing errors in this catalogue.
It also reserves the right to make changes to the specified features without prior notice.
All trademarks are property of their respective owners and are hereby acknowledged.