



Automatic packaging systems




Via Papa Giovanni XXIII, 18/20 - 20090 RODANO - Millepini (MI) Italy
Tel. **+39.02.95.32.72.81** r.a. email: uvendite@areapackaging.com
Fax +39.02.95.32.72.97 www.areapackaging.com

Importeur Benelux:
Idépack Verpakkingsmachines B.V. Tel. +31(0)33-299 00 08
Zeilmaker 8 Fax. +31(0)33-299 66 67
NL-3861 SM NIJKERK E-mail: info@idepack.com
The Netherlands www.idepack.com

www.areapack.com

R9 140 • R9 140/A • W140

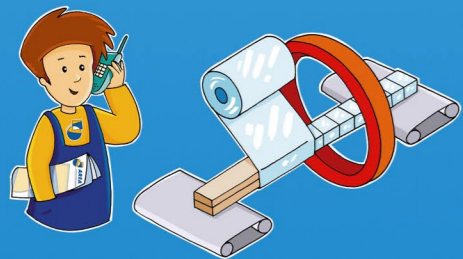

R9 140 • R9 140/A • W140

● SCHEDA TECNICA


R9 140
DIAMETRO RALLA:
 mm. 1400
VELOCITA' OPERATIVA:
 sino a 40 RPM
GRUPPO PINZA E TAGLIO:
 automatico ad azionamento pneumatico
FILM ESTENSIBILE:
 fascia mm. 250
 diametro interno mm. 76
ALLACCIAMENTO ELETTRICO:
 230V – 50Hz – 1F
ALLACCIAMENTO PNEUMATICO:
 6 bar

● SCHEDA TECNICA

R9 140/A
DIAMETRO RALLA:
 mm. 1400
VELOCITA' OPERATIVA:
 sino a 40 RPM
GRUPPO PINZA E TAGLIO:
 automatico ad azionamento pneumatico
NASTRINO MOTORIZZATO
 mm. 1000 in ingresso e mm. 1000 in uscita
PRESSORI IN INGRESSO/USCITA
 ad azionamento pneumatico
FILM ESTENSIBILE:
 fascia mm. 250
 diametro interno mm. 76
ALLACCIAMENTO ELETTRICO:
 230V – 50Hz – 1F
ALLACCIAMENTO PNEUMATICO:
 6 bar

● SCHEDA TECNICA

W140
BARRA SALDANTE:
 lunghezza mm. 1700
 corsa da piano di lavoro mm. 700
NASTRO MOTORIZZATO:
 mm. 2500 in ingresso
FILM:
 polietilene o a bolle d'aria
BOBINE FILM:
 diametro esterno sino a mm. 1500
 fascia da mm. 500 a mm. 1400
ALLACCIAMENTO ELETTRICO:
 230V – 50Hz – 1F
ALLACCIAMENTO PNEUMATICO:
 6 bar

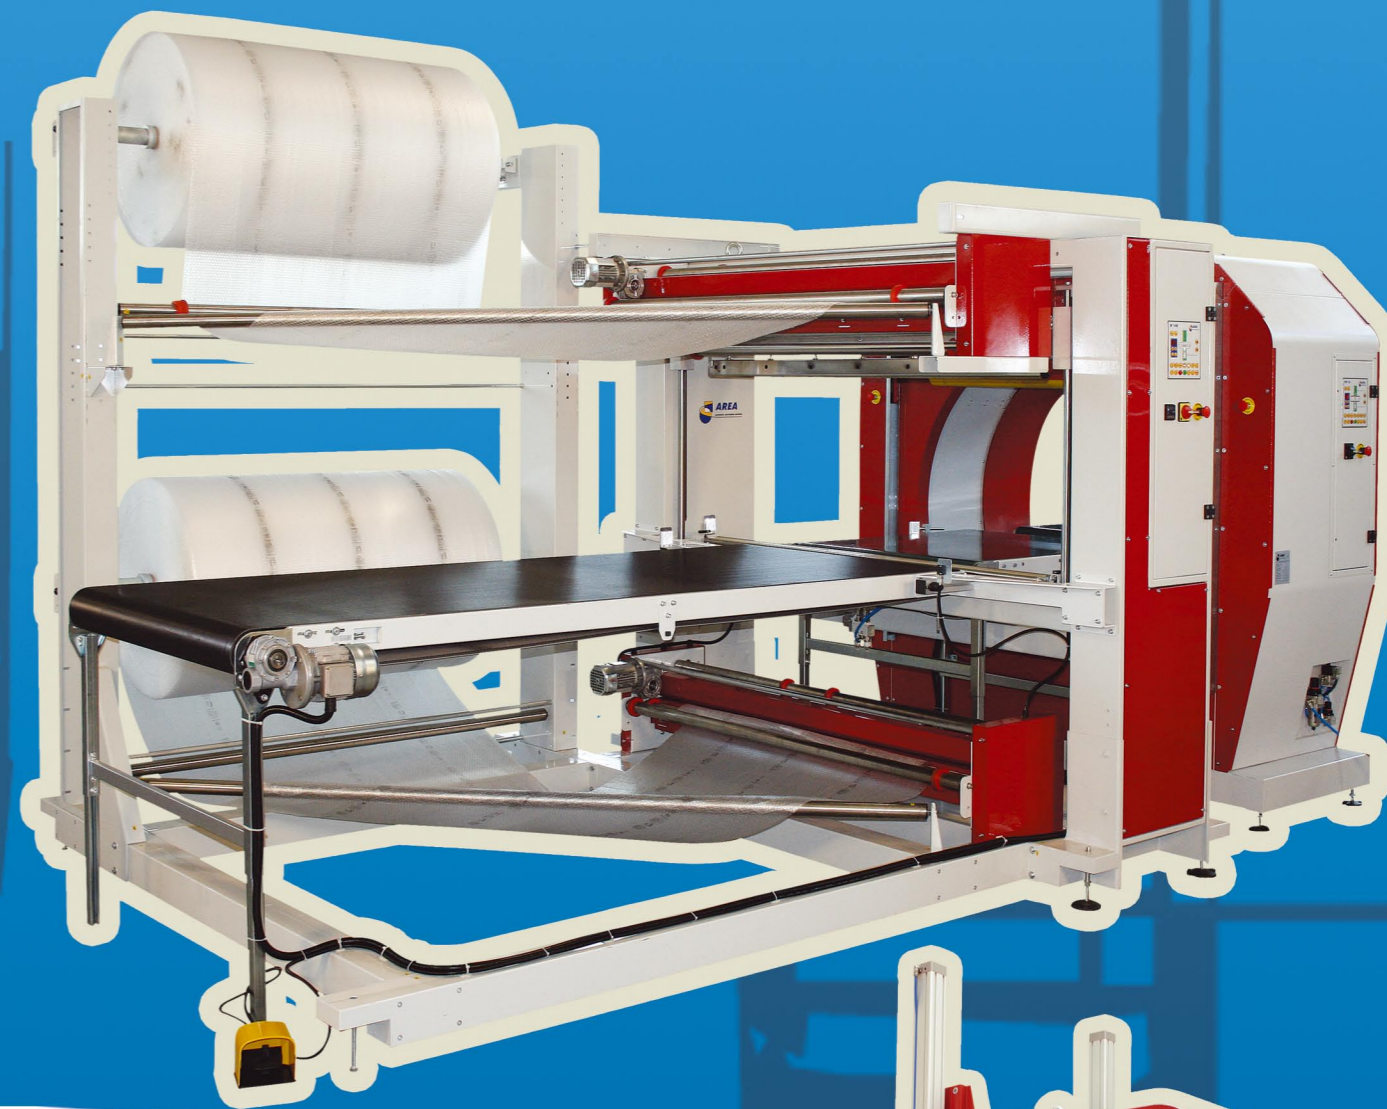

- W140 Fardellatrice
- W140 Welding Unit

R9 140 • R9 140/A • W140

● TECHNICAL DETAILS


R9 140
DIAMETER:
 mm. 1400
OPERATING SPEEDS:
 until 40 RPM
CLAMP AND CUT OF THE FILM:
 automatic, pneumatically operated
STRETCH FILM:
 width mm. 250
 internal diameter mm. 76
ELECTRIC CONNECTION:
 230V – 50Hz – 1PH
PNEUMATIC CONNECTION:
 6 bar

● TECHNICAL DETAILS

R9 140/A
DIAMETER:
 mm. 1400
OPERATING SPEEDS:
 until 40 RPM
CLAMP AND CUT OF THE FILM:
 automatic, pneumatically operated
POWERED BELT CONVEYOR :
 mm. 1000 inlet and mm. 1000 outlet
INFEEED AND OUTFEED PRESSURE UNIT :
 pneumatically operated
STRETCH FILM:
 width mm. 250
 internal diameter mm. 76
ELECTRIC CONNECTION:
 230V – 50Hz – 1PH
PNEUMATIC CONNECTION:
 6 bar

● TECHNICAL DETAILS

W 140
WELDING BAR:
 length mm. 1700
 stroke from the pass-line mm. 700
POWERED BELT CONVEYOR:
 mm. 2500 inlet
FILM:
 polyethylene or airball
FILM BOBBINS:
 external diameter until mm. 1500
 width from mm. 500 to mm. 1400
ELECTRIC CONNECTION:
 230V – 50Hz – 1PH
PNEUMATIC CONNECTION:
 6 bar

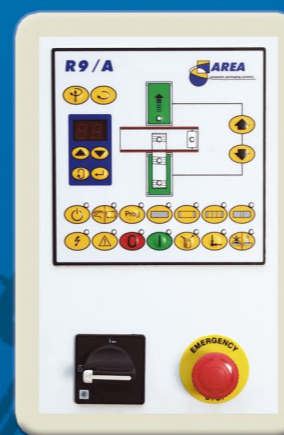

- Pannello di Controllo R9 140/A
- Control Panel R9 140/A



- R9 140/A